

Condur® EGHS2

CORMIX - A 3 COMPONENT HIGH STRENGTH, TEMPERATURE & FLOW EPOXY RESIN GROUT

DESCRIPTION

Condur EGHS2 is 3 component solvent free pourable high strength epoxy grout. The viscosity may be altered to specific applications by varying the quantity of component C used. Based on a highly sophisticated resin & hardener system, Condur EGHS2 provides excellent resistance in high temperature operating conditions this combined with its high strength & negligible shrinkage makes it ideal for installing critically aligned machinery.

USES & ADVANTAGES

Condur EGHS2 is used in the precision alignment of machinery in heavy industry such as compressors under ball mills, slab tables & other equipment in the gas & steel industry, in a wide variety of applications in the chemical, pulp & paper, mining & power industries where fast turnaround is required & high early & final strengths.

Advantages include:-

- No mixing ratios to measure.
- High physical strength.
- High impact strength.
- Strong bond to metal and concrete.
- Unaffected by weathering and freeze / thaw cycling.
- Superior resistance to fatigue.
- High chemical resistance.
- Solvent free no diluent.
- Shrinkage free hardening.
- Rapid hardening.
- Fast turn around.
- High early and seven day strengths.
- Superior physical properties at high temperatures.
- Variable fill ratio for optimum flowability, bearing area and economics on a project by project basis.
- Impact & vibration resistant.
- Can use in high temperatures
- Impervious to oil.

PROPERTIES

Components:	3 (Base, Hardener & Filler)
Form:	Pourable
Appearance:	Black (when mixed)
Mixed Density (kg/ltr):	2.25 ± 0.05
ASTM C905	
Working Time:	35 - 50 mins.

Compressive Strength: 7 days 105 N/mm²

ASTM C579, Method B

Compressive Strength at Elevated Temperature*
(High Flow)

25°C	55°C	80°C
105 N/mm ²	90 N/mm ²	68 N/mm ²

* Cure 24 hrs at room temperature and then conditioned for 24 hrs at test temperature.

Flexural Strength: 7 days 30 N/mm²

ASTM C580

Tensile Strength: 7 days 15 N/mm²

ASTM C307

Bond Strength: 7 days > 3 N/mm²

ASTM D4541 (concrete failure)

Chemical resistance (ASTM D543):

Citric Acid 10%	Excellent
Tartaric Acid 10%	Excellent
Acetic Acid 5%	Satisfactory
Nitric Acid 25%	Good
Hydrochloric Acid 25%	Excellent
Sulphuric Acid 50%	Very good
Sodium Hydroxide 50%	Excellent
Diesel Fuel / Petrol	Very good
Sugar Solutions	Very good
Lactic Acid	Very good
Hydrocarbons	Very good
Phosphoric Acid 50%	Very good

Application Temperature: +15°C to +40°C

Note:

- The above data is typical under laboratory conditions @25°C and does not constitute a specification. Field trials are recommended.
- The working time starts when the hardener is added to the resin material. Do not let the resin and hardener stand still without adding aggregates which may result in shorter working time. Working time will vary depending on the temperature and the quantity mixed. To get the optimum working time keep the material shaded and in a cool place.

CHEMICAL RESISTANCE

Condur EGHS2 resists non oxidising mineral acids and salts, caustics, dilute oxidising acids and salts, plus some organic acids and solvents. Please refer to Cormix International Ltd. for more information.

Condur® EGHS2

CORMIX - A 3 COMPONENT HIGH STRENGTH, TEMPERATURE & FLOW EPOXY RESIN GROUT

SUBSTRATE PREPARATION

Foundation Preparation

- Concrete should be old enough, if it is newly placed concrete then it needs to be 21-28 days old and to have reached its design strength.
- Concrete should have attained a minimum compressive strength of 21 MPa, higher strength concrete is recommended for optimum performance of grout.
- All surfaces should be dry, clean, free from standing water, grease, curing compounds, mould oils, all loosely adhered aggregates and cement particles, etc.
- Chip the concrete surface so aggregates are exposed to ensure all laitance and weak particles are removed. Alternatively use a spray on surface retarder when placing concrete. The exposed aggregate amplitude should not greater than 10-15 mm.
- Chamfer the edges of the concrete 45 degrees to 50 mm. width to avoid sharp corners which helps to reduce the potential for cracks.
- If anchor bolt sleeves are to be placed, be sure all water is removed and the void completely dry.
- Shade the foundation from direct sunlight for at least 24 hrs before grouting and 48 hrs after grouting.

Equipment Preparation

- Ensure the surface of base plate to be bonded with grout is free from rust, coatings, wax, oil, grease or scale. Mechanical methods such as grinding, sanding, etc can be used to remove laitance, scale, etc to give a sound and clean surface.
- Primers can be used when there is a long delay in cleaning and grouting which could allow rusting and contamination of base plate.

Formwork Preparation

- Before placing the formwork ensure the foundation and equipment is protected from rain or moisture.
- Seal off the areas that will not be grouted.
- Place forms no greater than 50 to 100 mm away from the edge of individual base plate or sole plate. However this may vary depending on the site requirement and application.
- Excessive edges/shoulders, may create thermal stress resulting in cracking.
- For long and narrow placements create a headbox to maintain pressure and to enhance proper placement.
- Forms should be liquid tight, they should be sealed with sealant, putty, foam or caulk. Do not allow to contact the grout.
- For long pours it is recommended to install expansion joints or divide the sections not exceeding 1.1m in length.

This reduces the opportunity for cracking due to the exothermic reaction of the material and differences in linear thermal expansion & contraction between the epoxy grout and concrete.

Deep Pour Recommendations

- Where ever a deep pour is necessary it is recommended to use rebar of 9 to 14 mm diameter to minimize stress cracking.
- Grouting should be done in multiple layers if more than the recommended thickness.
- When pouring in multiple layers ensure the previous layer is hardened and cooled.

MIXING

- Before mixing ensure all the components are cool, shaded and dry. If not preconditioned store all components below 25 °C for 24 hrs before using.
- The temperature of grout, baseplate and foundation are more important than the air temperature because they are directly related to the flow of grout.
- Add component A & B in a mixing vessel and mix under slow speed (RPM 400) for approximate 1 minute. Then add component C and continue mixing until a flowing uniform grout is achieved.
- Avoid excessive mixing which will result in reduction of working time and heat generation.

APPLICATION

- While grouting the base plates ensure there is sufficient pressure head to maintain movement of grout.
- Base plates with a flat base pour the grout from one side through the other across the short dimensions.
- Ensure entrapped air can escape when grouting closed areas.
- Where grout cannot flow or have smooth movement because of the length of pour pushing aids like steel chains, strips of plywood, etc can be used.
- The base plate with anchor bolts, dowel, starter bar, etc should be grouted first followed by the base plate.
- If grouting in multiple layers, it is necessary to sprinkle a small amount of 2.5 mm aggregate over the first layer before the grout reaches its setting time. Before placement of the 2nd layer brushout loose aggregates from the 1st pour.

Another method is to scabble gently the top surface and make it rough when grout reaches near to its setting time.

Condur® EGHS2

CORMIX - A 3 COMPONENT HIGH STRENGTH, TEMPERATURE & FLOW EPOXY RESIN GROUT

GROUTING THICKNESS

Minimum 10 mm to a maximum 40 mm in a single layer.

TYPICAL DETAIL


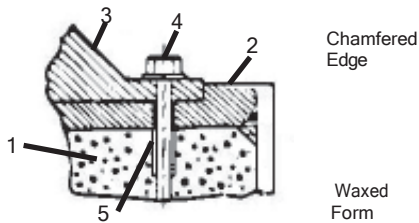


Figure 1 - Regular Equipment

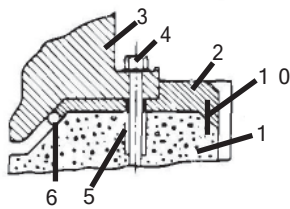

PERFORMANCE

Figure 2 - Engine with Oil Pan

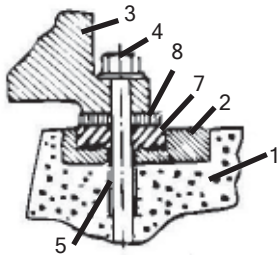


Figure 3 - Rail or Soleplate

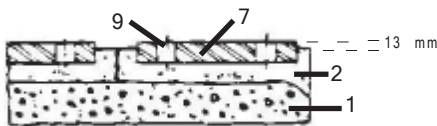


Figure 4 - Typical Rail With Expansion Joint Section

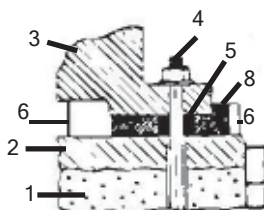


Figure 5 - Typical Epoxy Chock Application

Key

- | | |
|----------------------------|----------------------------|
| 1. Concrete Foundation | 6. Form |
| 2. Grout | 7. Soleplate or Rail |
| 3. Equipment Base | 8. Shim or Chock |
| 4. Anchor Bolt | 9. Expansion Joint |
| 5. Anchor Bolt Sleeve Seal | 10. Dowel or exposed rebar |

FINISHING

A smooth finish may be achieved before the grout reaches its setting time by spraying or brushing the surface with xylene, white spirit or epoxy grade thinner and then by using the steel trowel or wooden trowel level the surface.

CURING

- Cure time will depend on the ambient and substrate temperature. For the best results pour the grout and cure above 12°C
- The grouts setting time will be delayed and will not achieve the desired properties at temperatures below 5°C.
- For cold weather grouting please contact Cormix Technical Department for assistance.
- Construct a shelter over the foundation to protect the work area from the elements particularly during cold, wet or very hot conditions.

IMPORTANT NOTES TO ACHIEVE PRODUCT

- Do not alter the ratio of resin and hardener. Fillers can be varied as per site requirement.
- Do not thin the grout with solvent or water to make it more flowable.
- Always use a headbox to maintain pressure and the grouts flowability.
- Epoxy based grouts sometimes develop cracks. Cracks are generally caused by thermal stresses, temperature difference, sharp corners and edges, etc. Horizontal edge cracks may occur just below the grout concrete interface especially in outdoor installations. Chamfering the concrete edge helps in reducing such cracks.
- To reduce/prevent curling use dowels or scabble back to expose rebar.
- Following proper installation procedures will reduce the amount of crack development. The procedures contained in this data sheet highlight generally accepted field practises for successful grouting. These may be followed, modified or rejected by the user, however, they are not Cormix responsible for planning & understanding the installation appropriate to the conditions. If planned procedures differ from the data sheet contact Cormix Technical Service Department.
- If cracks develop use Condur SC (Low viscosity epoxy resin system) to repair the cracks. Consult Cormix.
- Make certain the most current version of the TDS & MSDS are being used by contacting Crest Coatings.
- Proper application is the responsibility of the user, field visits by Cormix personnel are for the purpose of making technical recommendations only & not for supervising or providing quality control at the job site.

Condur® EGHS2

CORMIX - A 3 COMPONENT HIGH STRENGTH, TEMPERATURE & FLOW EPOXY RESIN GROUT

CURING

- Cure time will depend on the ambient and substrate temperature. For the best results pour the grout and cure above 12°C
- The grouts setting time will be delayed and will not achieve the desired properties at temperatures below 5°C.
- For cold weather grouting please contact Cormix Technical Department for assistance.

STORAGE & SHELF LIFE

Store in dry conditions between 5°C - 30°C. The shelf life is 12 months when unopened and stored correctly.

CLEANING

Clean all tools and equipment immediately with Cormix Cleaner.

PACKAGING

A+B+C 10 & 25 kg. pre-measured sets or larger packaging upon request.

HEALTH & SAFETY

Avoid contact with skin and eyes and avoid breathing vapour. Use only in well ventilated areas away from heat sparks or naked flame. Wear suitable protective clothing, gloves and eye protection when mixing or using. If poisoning occurs, contact a doctor or Poisons Information Centre. If swallowed, do NOT induce vomiting give a glass of water. If in eyes, hold eyes open, flush with water for at least 15 minutes and see a doctor. If skin contact occurs, remove contaminated clothing and wash skin thoroughly with soap and water.

TECHNICAL SERVICE

The Cormix International Technical Service Department is available to assist you in the correct use of our products and its resources are at your disposal entirely without obligation.

QUALITY ASSURANCE

ISO 9001 : 2008 verified by TUV Nord.

CONTACT DETAILS

Cormix International Limited
Licenced Manufacturer & Distributor
Crest Coatings (Australia) Pty. Ltd.
13 Newmarket Lane,
Epping,
Victoria 3076
Tel. (03) 99452700
Fax. (03) 99452799
<http://www.crestcoatings.com.au>
E-mail: enquiries@crestcoatings.com.au